

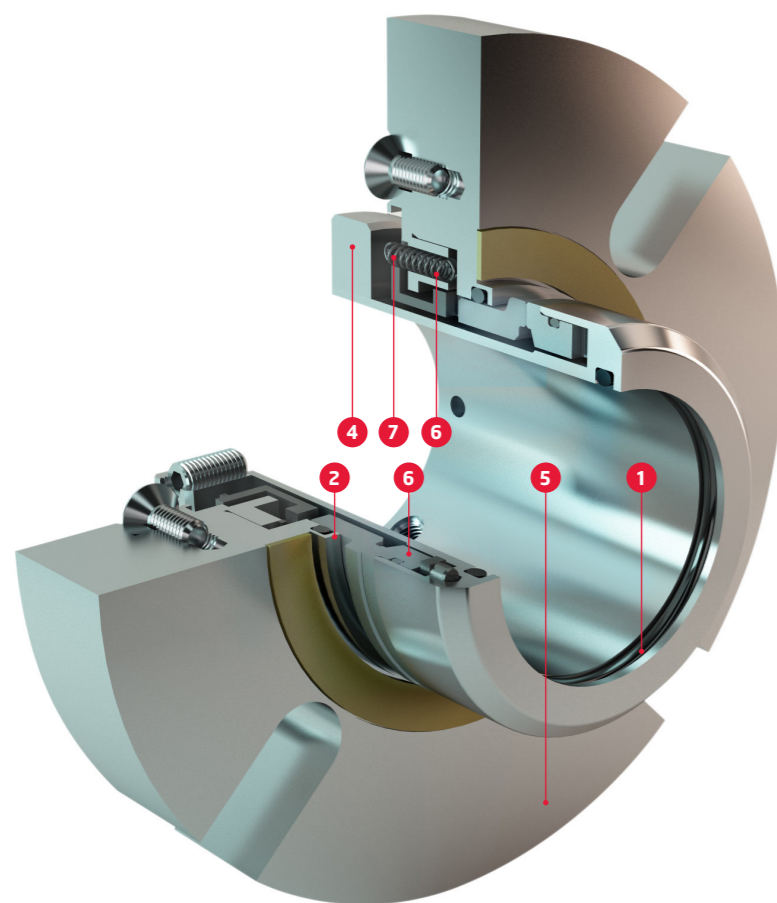
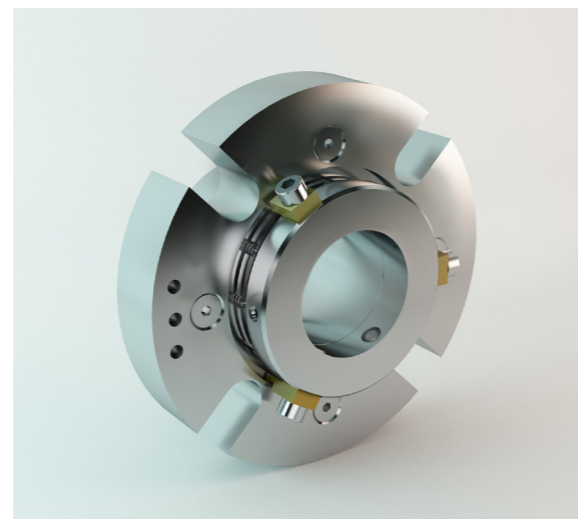
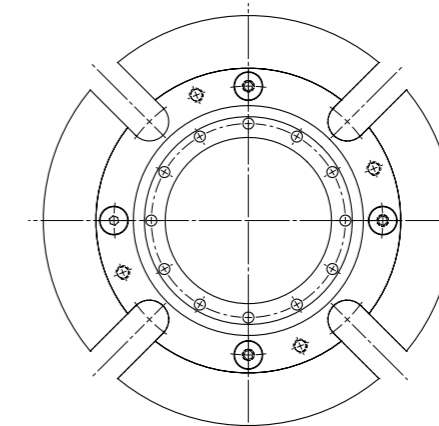


Huhnseal ES is a balanced single mechanical seal with a unique and modern design. The springs are not placed directly behind the stationary face, this being the most common competitor solution, but have been located on a larger diameter further away from the critical O-ring and seal face gap in order to reduce risk for clogging. Due to the relocation of the springs, more robust springs may be used enabling to change from compression to tension springs. The robust tension spring design gives the seal better performance since it is more difficult for particles and fibers from the product to reach and clog up the springs. Additionally the relatively long springs with larger wire diameter increase the axial and radial movement capabilities of the seal. First-class materials from carefully selected suppliers ensure optimized performance at minimized built-in dimensions.

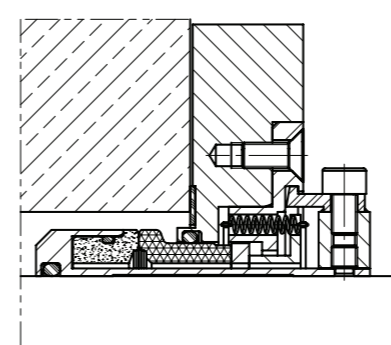

- 1 Hygienic solutions**
Smooth surfaces without cavities or closed spaces make the seal suitable for food and drug application. If required the gasket may be replaced with O-rings in execution according to EHEDG to achieve a hygienic designed seal suitable for CIP (Cleaning in Place).
- 2 Excellent angular movement capabilities**
Advantage when operating against closed valves, causing shaft bending.
- 3 H4 design**
The rotating sealing face on the product side has the new "H4-design". This means that the seal is O-ring mounted and the outer diameter of the seal face is the same as of the holder. This prevents the forming of turbulent flows, which cause heavy wear in abrasive liquids.
- 4 Advantageous built-in dimensions**
Fits in most standard pump stuffing boxes.
- 5 Optional additional flange for flushing**
The seal may be equipped with an extra flange when flushing into the media is needed. The standard design is without flange since the chamber with a small gap given by the flushing flange may encourage material build-up if flush is not connected.
- 6 Spring package located on the outside of the flange**
This design is better protected against fiber and particle build-up, which eventually causes clogged-up springs.
- 7 Patented tension springs**
Allow for an excellent axial movement of $\pm 2,0$ mm. Patent No: 9803436-6

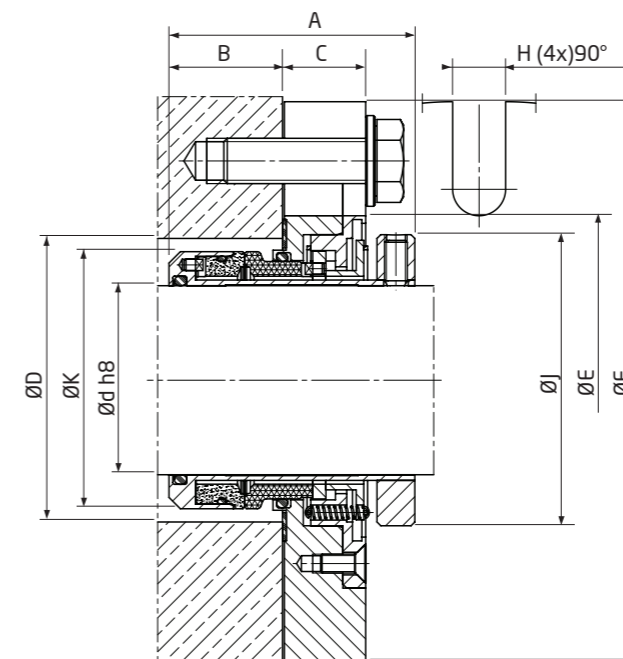


$P_{max} = 25 \text{ bar}$
 $T_{max} = 100^\circ\text{C}$
 $V_{max} = 18 \text{ m/s (3600 rpm)}$
 Axial movement: $\pm 2,0 \text{ mm}$

d	A	B	C	Dmin	Dmax	E	F	H	J	K
25	66	30	22	44	54	62	105	14	52	43
28	66	30	22	47	57	65	105	14	55	46
30	66	30	22	49	59	67	105	14	57	48
32	66	30	22	51	61	70	110	14	9	50
33	66	30	22	52	62	70	110	14	60	51
35	66	30	22	54	64	72	112	14	62	53
38	66	30	22	57	67	75	122	14	65	56
40	66	30	22	59	69	77	122	14	67	58
43	66	30	22	62	72	80	132	14	70	61
45	66	30	22	64	74	82	138	14	72	63
48	66	30	22	67	77	85	138	14	75	66
50	66	30	22	69	79	87	148	14	77	68
55	66	30	22	74	84	93	148	18	82	73
60	66	30	22	79	92	102	157	18	87	78
65	66	30	22	84	99	109	163	18	92	83
70	66	30	22	89	108	118	178	18	97	88
75	75	35,5	25	101	118	129	190	18	108	100
80	75	35,5	25	106	124	135	194	18	113	105
85	75	35,5	25	111	128	139	198	22	118	110
90	75	35,5	25	116	135	145	204	22	123	115
95	75	35,5	25	121	138	148	208	22	128	120
100	75	35,5	25	126	144	154	218	22	133	125

ESF - Single Seal with optional Flushing Flange

Depending on the application, the seals may be equipped with an additional flange in order to achieve balanced pressure, flushing and/or additional cooling. This will increase the lifetime of the seal.

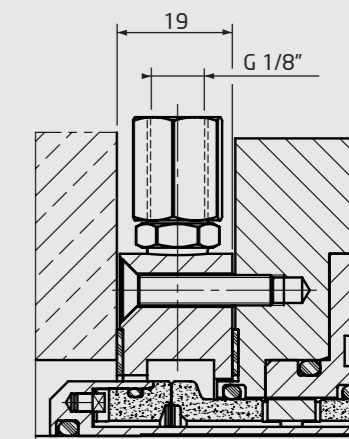

The axial built-in measurement increases with 19 mm irrespective of the shaft dimension.

