

RELY ON EXCELLENCE

# STD1

Mechanical seals | Agitator seals | Shut-down seals

**Advantages**

Can be installed in each position.

**Operating range**

Shaft diameter:

$d_3 = 40 \dots 200 \text{ mm (1.57" } \dots \text{ 7.87")}$

Pressure:  $p_1 = 16 \text{ bar (232 PSI)}$

Temperature:  $t = +100 \text{ }^\circ\text{C (+212 }^\circ\text{F)}$

Elastomer sealing element (Item no. 1) with pneumatic or hydraulic actuation (closing pressure  $p_4 > p_1$ ).

! It should be noted that the extremal values of each operating parameter cannot be applied at the same time because of their interaction.

**Notes**

This seal can only be used if the product does not harden or congeal during the shut down period or for sterile operation (fermenting vessels). Not available in PTFE.


**Recommended applications**

- Chemical industry
- Pharmaceutical industry
- Agitators

**Features**

If a STD is employed, it is possible to change seals with the vessel loaded and under pressure (shaft must be stationary!). Installation dimensions according to DIN 28138 Part 1 are possible. Material properties have to be taken into account.

RELY ON EXCELLENCE

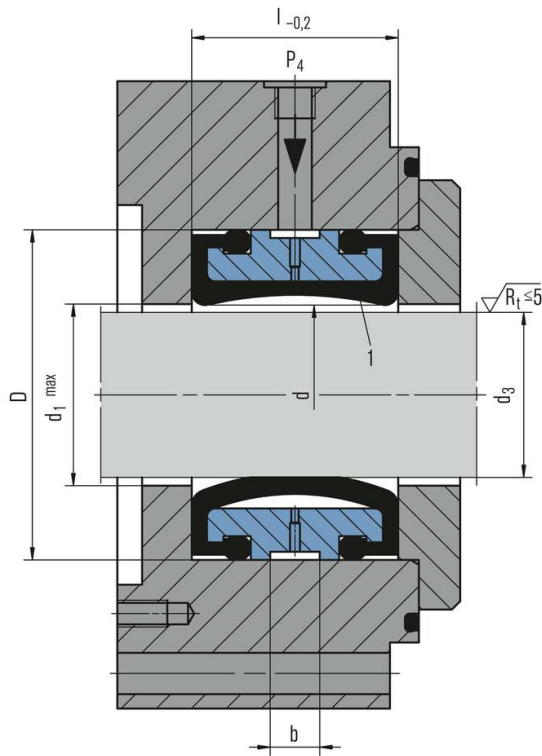

## Dimensions

$d_3$	$d$	$d$	$d_1$	$l$	$b$
40	76	42.5	42	38.0	8
50	84	52.5	52	38.0	8
60	95	62.5	62	44.5	10
80	118	82.5	82	45.0	10
100	138	102.5	102	45.0	10
125	160	127.5	127	45.0	10
140	180	143.5	143	50.0	12
160	200	163.5	163	50.0	12
180	215	183.5	183	50.0	12
200	240	203.5	203	50.0	12

Dimensions in millimeter

All technical specifications are based on extensive tests and our many years of experience. The diversity of possible applications, however, means that they can serve only as guide values.

We must be notified of the exact conditions of application before we can provide any guarantee for a specific case. This is subject to change.